

Tuttle & Bailey®


SUBMITTAL DRAWING

- Supply slots with contoured blades (non-adjustable) on each end of diffuser
- Center down blow section (adjustable) provides vertical airflow
- Integral return is mounted on side of diffuser
- Single slot configuration with 3/4” slot width (return slot has 2” width)
- Available lengths: 24”, 36”, 48”, 60”
- Standard finish is black exposed surfaces and pattern controller / blades
- Steel construction



Section D-D

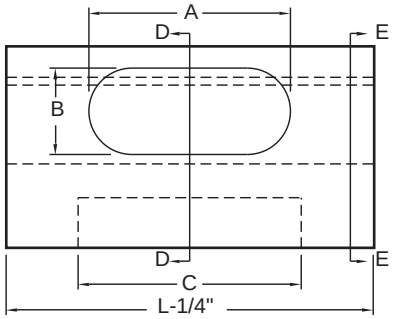

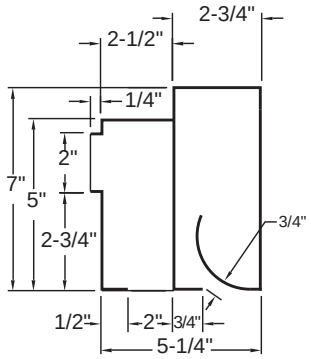


Section E-E


Available Inlet Sizes	A	B
6"	7-9/16"	3"
8"	10-1/16"	4"
10"	13-1/4"	4"

Available Lengths (L)	Available Down Blow Slot Dimensions (C)
24"	8"
36"	12", 15", 18"
48"	
60"	

24" length available
in 6" and 8" inlets only.

The HIDR is designed for standard Lay-in T-bar ceiling systems. The optional PF plaster frame can be used to mount the diffuser in sheet rock or plaster ceilings (PF is mounted by others). Height is 1-1/2".



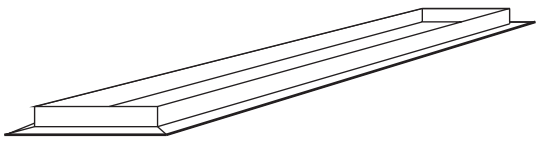

Optional Plaster Frame (PF)

Dimensions are in inches. Product information subject to change without notice.

PROJECT:	SUBMITTED BY:	DATE: 5-28-02	SD-1860
ARCHITECT:		**HIDR** Supply / Return Plenum Slot Diffuser with Down Blow Section	
ENGINEER:			
CONTRACTOR:			
LOCATION:			